
STROKE

Shoulder type of guide bushing · Standard Wall Thickness

Ex Order.（For detailed ordering examples, please refer to Page 10.）

Model	D	L	L1	L2
KU	3	40	10	10

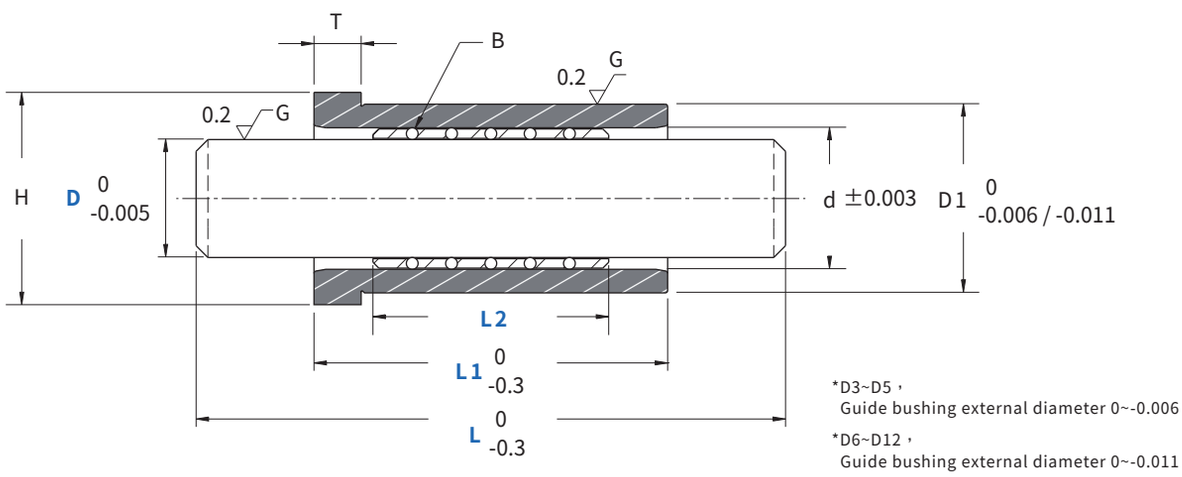

*D3~D5，
Guide bushing external diameter 0~-0.006
*D6~D12，
Guide bushing external diameter 0~-0.011


D	L (KU/KH)(KHO/KTO) Unit length(1mm)	L (KHT/KTT) Unit length(10mm)	L1	L2	D1	d	M	T	H	B
3	40~70	-	10/20/30	10/15/20	7	5	-	2.5	9	
4	40~70	-	10/20/30	10/15/20	8	6	-	3	10	
5	40~90	40~90	10/20/30	10/15/20	10	7	M3	3	12	
6	40~90	40~90	15/20/30	15/20/30	11	8	M3	4	13	1.0
8	40~150	40~100	15/20/30	15/20/30	12	10	M4	4	14	
10	40~150	40~100	20/30/40	20/30/40	16	12	M5	4	18	
12	40~150	40~100	20/30/40	20/30/40	18	14	M6	4	20	

Guide post

Features


1. Low-friction rotating motion is possible.
2. High-precision rotating motion is possible.
3. The most basic specification of the miniature guide set.

Straight type

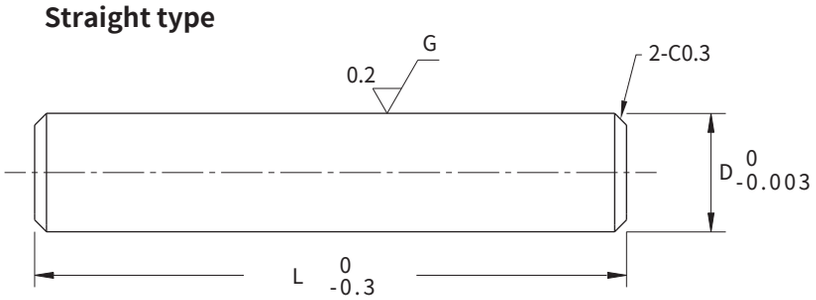


Model	Material
KU	SUJ2 Bearing Steel
KH	SUS440C Stainless Steel

Internal thread tube at one end type

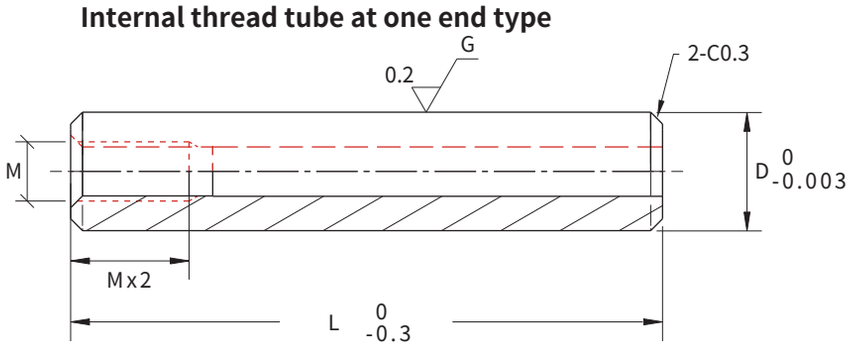

Model	Material
KHO	SUJ2 Bearing Steel
KTO	SUS440C Stainless Steel

Internal thread tube at both end type

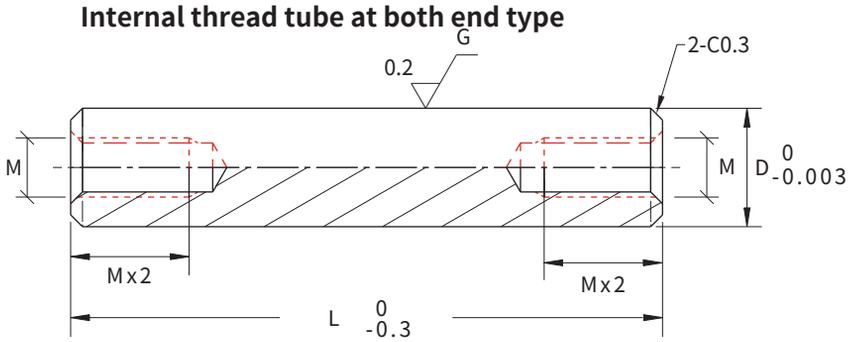

Model	Material
KHT	SUJ2 Bearing Steel
KTT	SUS440C Stainless Steel