


HAP017

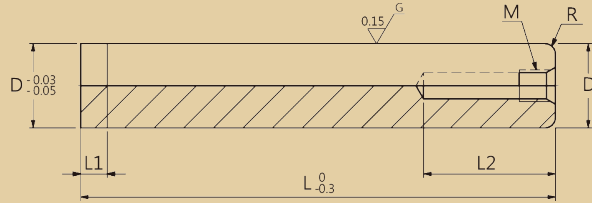

Type 品名	Roundness 真圓度	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Hardness Penetration 熱處理深度	Delivery 交貨日
HAP017	2μm	SUJ2(1.3505) 軸承鋼	Surface Hardened 高頻淬火	HRC62±2	1.5~2mm	3 Working Days 3 個工作日

Type	D	TOL.	L	M	R	L1	L2
HAP017	20	+0.020 +0.015	100/110/120/130/140/150/160/170/180	M10x1.5	2	4	38
	22	+0.020 +0.015	120/130/140/150/160/170/180	M10x1.5	3	4	42
	25	+0.020 +0.015	120/130/140/150/160/170/180	M12x1.5	3	4	50
	28	+0.025 +0.020	140/150/160/170/180/190/200	M12x1.5	3.5	5	50
	32	+0.025 +0.020	160/170/180/190/200/220/240	M12x1.5	3.5	5	60
	38	+0.030 +0.025	180/190/200/220/240/260	M16x1.5	4	6	60
	45	+0.030 +0.025	180/190/200/220/240/260	M16x1.5	4	6	70
	50	+0.035 +0.030	200/220/240/260	M16x1.5	5	7	70

Order Ex. 訂購範例

HAP017-D-L

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length change 長度尺寸變更		HAP017-20-A117	Length change to 117mm 長度尺寸變更為117mm